


MANUAL V2.0

SLACKLINE POLES



Please check regularly for updates of this manual on slacktivity.com




1. Remove the bottom casing cover with a suction cup. Insert each matching Slackline post in the sleeves. Turn the poles that the knobs are aligned opposite to the direction of the pull side.

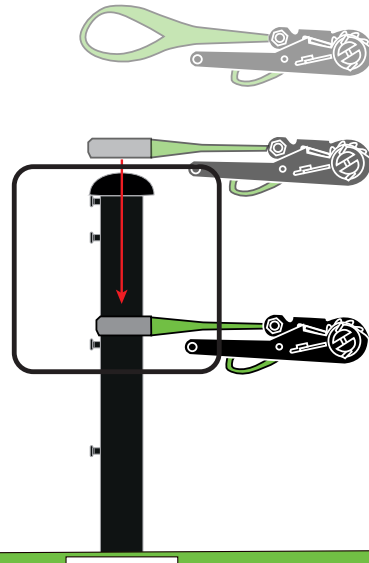


2. Push back the V-loop of the ratchet, respectively the slackline on the post. Make sure that the lever of the ratchet is facing down. The V-loop should be placed just above the nubs. When clamping the slackline is important to note that the V-loop remains exactly on the knobs.

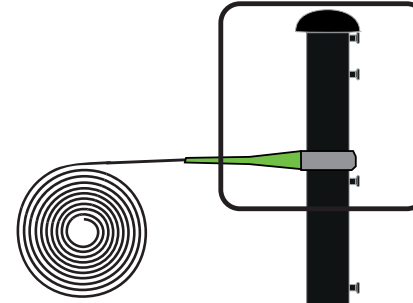


3. Insert the slackline-top down through the ratchet slit. Make sure that the slackline is not twisted..




4. Pull the Release-Handle (A) to unlock the ratchet and open the ratchet lever (B)



5. Tighten the slackline as hard as you can with one hand and operate the ratchet with the other. Tighten the slackline as hard as you like it to be. A hand force of 400N (=40kg) must not be exceeded.



6. Pull the Release-Handle (A) and close the ratchet lever (B) to lock the ratchet. The ratchet lever is closed if it can't be opened anymore without pulling the Release-Handle.

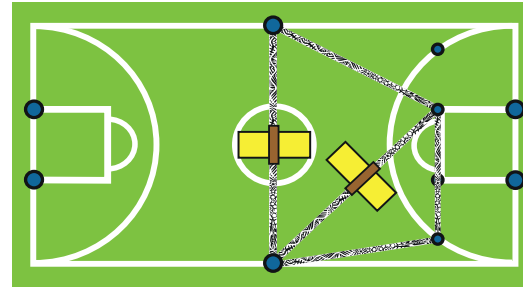

With the ground pods the horizontal bar volleyball or handball a square slackline system can be built. Longer Slacklines can (three elements) can be divided with a jump box.



Tips & recommendations






To ensure a proper long-term function, ratchets should be lubricated occasionally. By outdoor use every 3 month this application is recommended.



Videos with trick-tutorials can be found under: www.slacktivity.com

Disassembly instructions

Pull the Release-Handle (A) and open the ratchet lever (B). Bring the ratchet to full extension with pulled Release-Handle. In doing so a pressure point has to be overcome. With opening the ratchet the slackline might be detensioned with a bang depending on the pretension.



Safety advice

English

The slackline system should always be supervised. In games pay particular attention to the potential tripping hazard.




The slackline may only be used for balancing.


It is important that the slackline is wound up evenly on the ratchet spindle to avoid damage and abrasion of the slackline.



Avert your eyes from the ratchet when loosening a strongly tightened slackline, since sparks can occur during that process. This might happen with any kind of slackline-sets that work with a ratchet system, so be aware!



At the top position of the pole only a single slackline may mounted. If position 1 is used, a slackline may also be mounted on maximum position 2. If position 1 is not used, maximum three slacklines can be mounted on position 2 or 3.



Prior to each use check the slackline in particular for damage of the tree loops. A damaged slackline-set must not be used in any case! The slackline-set must be replaced after three years at the latest.



Take care when mounting the slackline on artificial objects. Control that the object can hold loads of up to 7 kN (= 700kg) with double safety. Wall bars, play and horizontal bar poles are NOT suitable.

