

# MANUAL V1.0

## HighlineWebbing

PINKTUBE C

Please check regularly for updates of this manual on [slacktivity.com](http://slacktivity.com)


# SLACKTIVITY

Specifications:

- » Width: 26mm
- » Weight: 54g/m
- » Material: 100% Polyamide (PA)
- » Webbing-Type: Tubular Webbing (T)
- » Stretch: 15% at 5kN / 22.6% at 10kN




English



## 1. Area of application

The area of application of the highline-webbing "pinkTube Type B" embraces the use as a slackline. Both in parks and as highline. It is equipped with three T-Loops, two MainLoops and one BackupLoop. The webbing can be fixed with the MainLoop-1 without a further weblock. The webbing should be secured back with the BackupLoop. The MainLine can be connected to a BackupLine by using the T-Loops with QuickLinks. **In slacklining and highlining there is a potential risk of accident, severe injury or death. Therefore this product must only be used by trained or otherwise competent persons or people that are under direct supervision and visual control of such a person.**

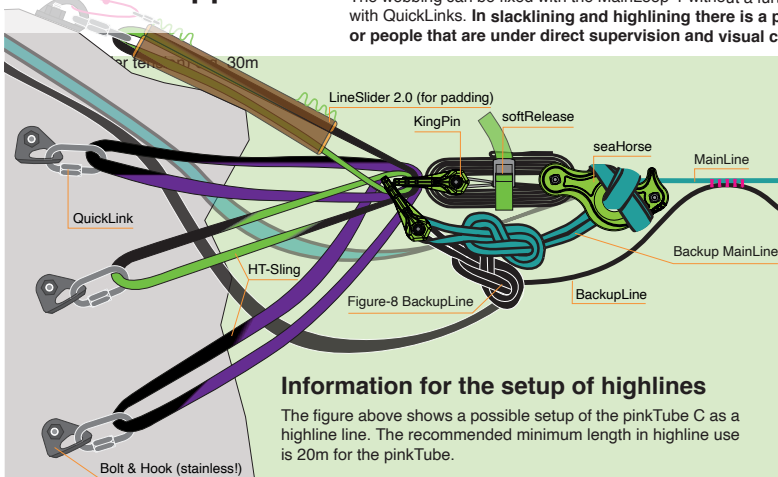

### Information for the setup of highlines


The figure above shows a possible setup of the pinkTube C as a highline line. The recommended minimum length in highline use is 20m for the pinkTube.

## 2. How to use


- 2.1 Attach the MainLine and the BackupLine with «MainLoop-1», «BackupLoop» and «Loop-1 BackupLine» to one anchor point.
- 2.2 Use a suitable method to get the webbing of MainLine and BackupLine to the second anchor point. Attach the Leash to both webbings. Insert the MainLine into the weblock and tension it with a HangOver-Pulley (or another tensioning system of your choice).

- 2.3 Attach the BackupLine with a figure-8 to the anchor point (Masterpoint). Tie off the system of the MainLine to the anchor point with the webbing coming out of the weblock with the method described in the weblock-manual.
- 2.4 Tape the BackupLine to the MainLine.

**Info:** A tidy and clear tie back of the main line can prevent a failure of the system in case of mistakes at the anchor points. This tie back should be done with the BackupLoop on one side and with the webbing coming out of the weblock on the other side.

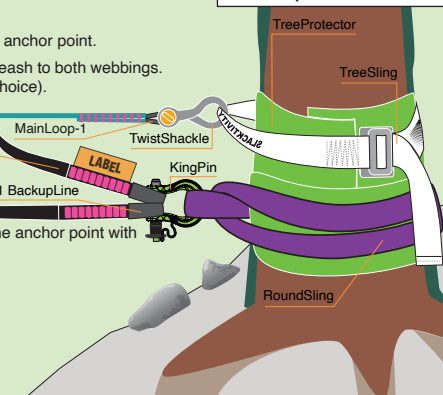


## 3. Warnings

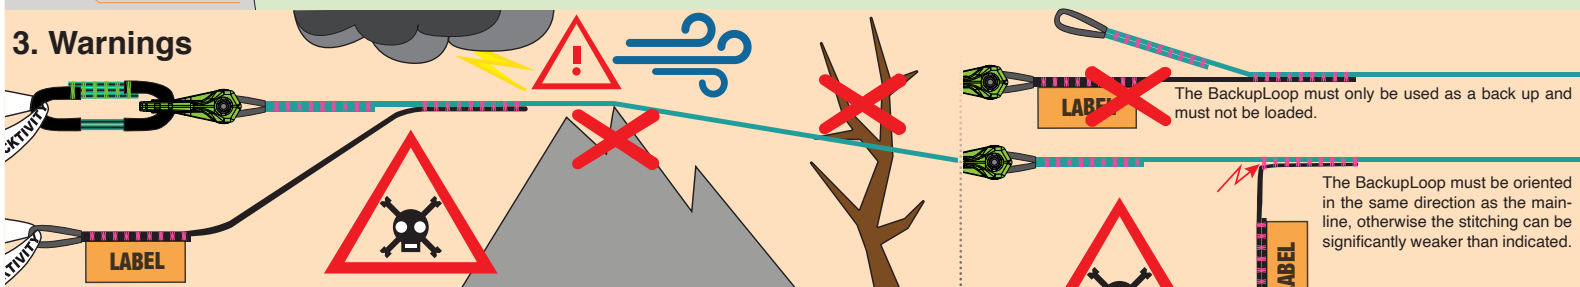

The slackline webbing must be installed hanging freely. No support. Make sure to leave enough space to branches and other obstacles so that no contact is possible even when the line is being moved heavily to different sides.

It is recommended to de-rig the line in case of an upcoming thunder storm or when heavy winds are announced.

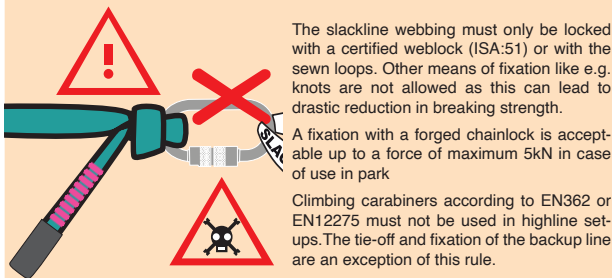

The slackline webbing must only be locked with a certified weblock (ISA:51) or with the sewn loops. Other means of fixation like e.g. knots are not allowed as this can lead to drastic reduction in breaking strength.

A fixation with a forged chainlock is acceptable up to a force of maximum 5kN in case of use in park


Climbing carabiners according to EN362 or EN12275 must not be used in highline set-ups. The tie-off and fixation of the backup line are an exception of this rule.

## 4. Life span and replacement

Under optimal storage conditions and with appropriate use without obvious wear and tear there is a life time limitation of 180 days of use. It is recommended to keep records of the days of use to make sure to replace the webbing in time. In general, the service life of the product is reduced when used in extreme conditions, in environments with UV-light, salt, sand, dirt, mold, snow, ice, moisture or in chemicals. In some circumstances, the pinkTube can sustain damage to such a degree that its service life is reduced to a single use. Before each use check the condition of the pinkTube in degradation, wear and rigidification. Especially in case of severe wear the product should not be used anymore. This is the case when the webbing shows cuts, visual/perceptible imperfections, burns or severe friction damage

**Transportation and storing:** The product must be transported separated from sharp objects and stored dry and protected from light, separated from acids, bases and solvents. After contact with salty water or sand, it is recommended to wash the webbing by hand with clean water.

## Connecting slacklines

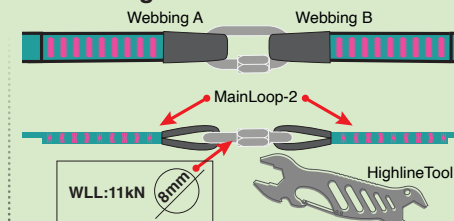

Two webbings (A+B) can be connected with a 8-10mm oval quicklink connecting the two end loops (MainLoop-2). The quicklink must be screwed tight with the HighlineTool (or a similar tool) in a way that it cannot be opened by hand anymore. For optimal performance we recommend the 8mm INOX quicklink of Maillon Rapide.

## Additional Information

Developed and designed by SLACKTIVITY Switzerland  
Made in Taiwan

Please report incidents and accidents with Slacklines on this URL: [sair.slacklineinternational.org](http://sair.slacklineinternational.org)

## Contact

SLACKTIVITY.CH Ltd.  
Dörfli 2, 8765 Engi, Switzerland  
Phone: +41 77 408 03 57  
Email: [info@slacktivity.ch](mailto:info@slacktivity.ch)  
URL: [www.slacktivity.com](http://www.slacktivity.com)

© by SLACKTIVITY  
Seite: 1/1

**Disclaimer:** All the information in this document is only a recommendation from SLACKTIVITY (Slackline-Gear-Manufacturer). This is not an official guideline. Every highline anchor point looks different. Making an anchor point **cannot be learnt from this document only** but from courses and with experience. SLACKTIVITY is not responsible for misuse or accidents caused by this recommendations.